

# Ultrane 553

## DESCRIPTION AND GENERAL PROPERTIES

- **Material** Nitrile
- **Length (cm)** 21-26
- **Thickness (mm)**
- **Wrist** Knitted wrist
- **Colour/Color** Black
- **Interior finish** Seamless textile support
- **Exterior finish** Ventilated back
- **Size / EAN** 6 7 8 9 10
- **Packaging** 1 pairs/bag - 10 pairs/bag - 100 pairs/carton
- **Complementary information** Available in single pack and polybag of 10 pairs  
Guaranteed without DMF  
Guaranteed without silicone



## PERFORMANCE RESULTS

Certification category 2



Dexterity EN 420 : 5/5


4121X

### Legends

#### EN 388 MECHANICAL HAZARDS




##### PERFORMANCE LEVELS

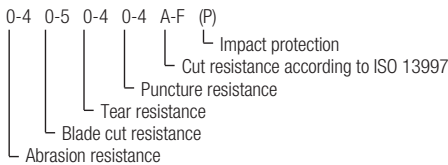

#### EN 407 THERMAL RISKS heat and fire



##### PERFORMANCE LEVELS

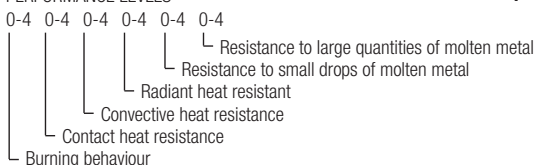

#### CHEMICAL RISKS

##### EN ISO 374-1



Type A  
U V W X Y Z

- A** Methanol
- B** Acetone
- C** Acetonitrile
- D** Dichloromethane
- E** Carbon Disulfide
- F** Toluene
- G** Diethylamine
- H** Tetrahydrofuran
- I** Ethyl acetate

##### EN ISO 374-1



Type B  
X Y Z

- J** n-Heptane
- K** Sodium hydroxide 40%
- L** Sulphuric acid 96%
- M** Nitric acid 65%
- N** Acetic acid 99%
- O** Ammonia 25%
- P** Hydrogen peroxide 30%
- S** Hydrofluoric acid 40%
- T** Formaldehyde 37%

##### EN ISO 374-1



Type C

#### MICRO-ORGANISMS

##### EN ISO 374-5



Protection against bacteria, fungi

##### EN ISO 374-5




Protection against bacteria, fungi, virus

##### VIRUS



#### COLD HAZARDS

##### PERFORMANCE LEVELS



#### RADIOACTIVE CONTAMINATION



#### CUT RESISTANCE

<b>A1</b> ≥ 200 G	<b>A4</b> ≥ 1500 G	<b>A7</b> ≥ 4000 G
<b>A2</b> ≥ 500 G	<b>A5</b> ≥ 2200 G	<b>A8</b> ≥ 5000 G
<b>A3</b> ≥ 1000 G	<b>A6</b> ≥ 3000 G	<b>A9</b> ≥ 6000 G

For more details: [www.mapa-pro.com](http://www.mapa-pro.com)

**MAPA**  
PROFESSIONAL

[www.mapa-pro.com](http://www.mapa-pro.com)

## SPECIFIC ADVANTAGES

- Excellent abrasion resistance: longer-lasting
- Nitrile coating resistant to dirt particles
- Excellent tactile sensitivity and freedom of movement, due to the reduced thickness of the glove
- Available in vending machine packaging

## MAIN FIELDS OF USE

### Automotive/mechanical industry

- Sorting small parts
- Screwing and bolting
- Pump manufacturing
- Precision assembly

### Other industries

- Packaging
- Minor maintenance Tasks
- Light handling in storage areas

### Local Authorities (Technical Maintenance)

- Small general maintenance jobs

### Construction Industry (Metalworkers/Locksmiths)

- Handling and installing metal structures

### Construction Industry (Painters/Decorators)

- Preparing surfaces

## INSTRUCTIONS FOR USE

### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
- It is not recommended for persons sensitised to natural latex and dithiocarbamates.
- Put the gloves on dry, clean hands.
- Ensure the insides of the gloves are dry before putting them on again.
- Caution : using the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

### Storage conditions

- Store the gloves in their original packaging protected from heat, light and humidity.

### Food contact US

- FDA 21CFR 177.2600

## LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- **UE type certificate or CE type examination certificate** : 0075/014/162/08/18/1657
- **Issued by the notified body nr** : 0075 - C.T.C - 4 rue Herman FRENKEL - F - 69367 LYON CEDEX 07