


# TECHNICAL DATASHEET

# 607010022

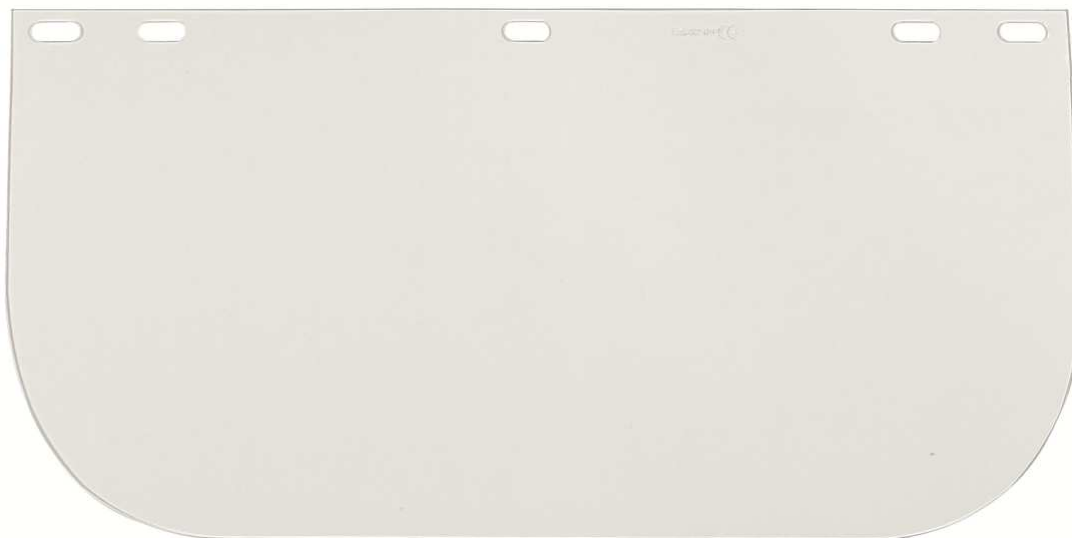

## FEATURES:

- Protects against impacts and UV radiations
- Can be used for prolonged periods as it does not create distortion or fatigue
- No colour distortion
- Available UV400 version for an increased UV protection
- Mirrored version (FM) gives protection from glare

## FEATURES FRAME:

|                         |                    |
|-------------------------|--------------------|
| Frame Typology          | <b>VISOR</b>       |
| PPE field of view       | <b>&gt;40°</b>     |
| Complete PPE weight (g) | <b>93</b>          |
| Size [mm]               | <b>390x195x1,0</b> |
| Frame Features          | ---                |
| Elastic Band Features   | ---                |
| Ventilation System      | ---                |
| Spare parts             | ---                |

## FEATURES OCULARS/LENSES:

|                          |                      |
|--------------------------|----------------------|
| Material Ocular/Flip-up  | <b>Polycarbonate</b> |
| Colour                   | <b>Transparent</b>   |
| Technical Treatment      | ---                  |
| Treatment                | ---                  |
| Thickness [mm] (+/- 0,1) | <b>1,0</b>           |
| Curvature                | ---                  |
| Optical Class            | <b>1</b>             |
| VLT % (+/-5%)            | <b>89,1</b>          |
| UV Protection            | ---                  |

## MARKS:

|                    |                 |
|--------------------|-----------------|
| Standard Reference | <b>EN166</b>    |
| Frame Marking      | ---             |
| Visor Marking      | <b>U 1 B CE</b> |

## FIELDS OF EMPLOYMENT

- B** Protection against low-speed particles 120 m/s - medium energy

**Notes :** Applications : Mechanical work in good visibility conditions

